


HEATGUARD

TYPICAL PROPERTY VALUES

DENSITY:	.15 g/cc
FLEXURAL STRENGTH:	325 psi
COMPRESSIVE STRENGTH:	350 psi
THERMAL CONDUCTIVITY:	.15 to .29w/mk
1500F.	.15w/mk
2000F.	.22w/mk
2400F.	.26w/mk
2800F.	.29w/mk
RESISTIVITY:	.3 ohm-in
ASH:	0.14%
PURIFIED:	0.000005%
CARBON CONTENT:	99%

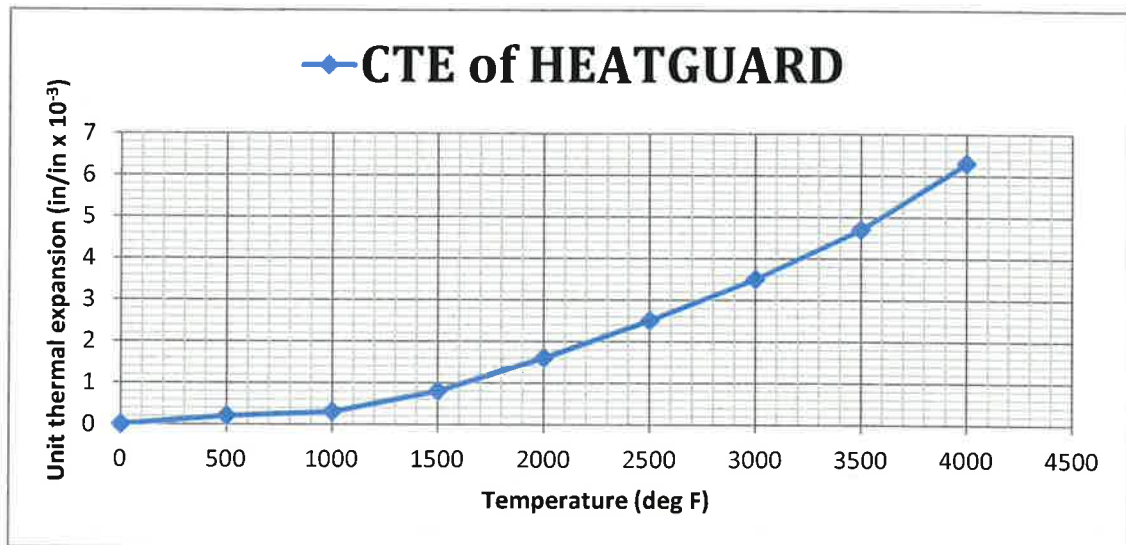

Material available as raw board, sealed board or sealed and coated.
 Boards foiled on one or both sides are available.

Complete machined shapes are also available.